

# CTJ-20 OPTIMIX® 20 GALLON JACKETED GLASS-LINED STEEL REACTOR

## Specifications

|                               |                            |
|-------------------------------|----------------------------|
| Vessel Design Pressure (psig) | 150 and F.V.               |
| Jacket Design Pressure (psig) | 115 or 100<br>w/ Int. F.V. |
| Design Temperature (°F)       | 500                        |
| Jacket Heating Area (sq. ft.) | 8.5                        |

## Dimensions (inches)

|                       |                                  |
|-----------------------|----------------------------------|
| A                     | 19 <sup>5</sup> / <sub>16</sub>  |
| B                     | 6                                |
| C                     | 28 <sup>11</sup> / <sub>16</sub> |
| D                     | 84 <sup>13</sup> / <sub>16</sub> |
| E                     | 4 <sup>5</sup> / <sub>8</sub>    |
| F (I.D.)              | 19 <sup>1</sup> / <sub>4</sub>   |
| G (O.D.)              | 23 <sup>5</sup> / <sub>8</sub>   |
| H (nozzle elevations) |                                  |
| 1 1/2" nozzle         | 5                                |
| 2" nozzles            | 5 <sup>1</sup> / <sub>2</sub>    |
| J (nozzle radius)     |                                  |
| 1 1/2" nozzle         | 7 <sup>1</sup> / <sub>4</sub>    |
| 2" nozzles            | 7 <sup>3</sup> / <sub>4</sub>    |

## Capacity (gallons)

|                        |      |
|------------------------|------|
| Working                | 20   |
| Total Volume           | 24   |
| Head Volume            | 3    |
| Per Inch Straight Side | 1.25 |
| Jacket                 | 8    |

## Weight (pounds)


|                              |     |
|------------------------------|-----|
| Bare Body (no accessories)   | 745 |
| Complete (with drive system) | 960 |
| Add for Shipping             | 150 |

## Lenze® Helical Gear Drive

|                   |                 |
|-------------------|-----------------|
| Motor             | 1.5HP           |
| Motor Type        | XP              |
| Drive Size        | GST05 2N VCR 5D |
| • Low Noise Level |                 |

## Pitch Blade Turbine Agitator

|                        |         |
|------------------------|---------|
| Span (inches)          | 10      |
| Blade Angle            | 45°     |
| Speed (standard speed) | 214 RPM |
| • Clockwise Rotation   |         |

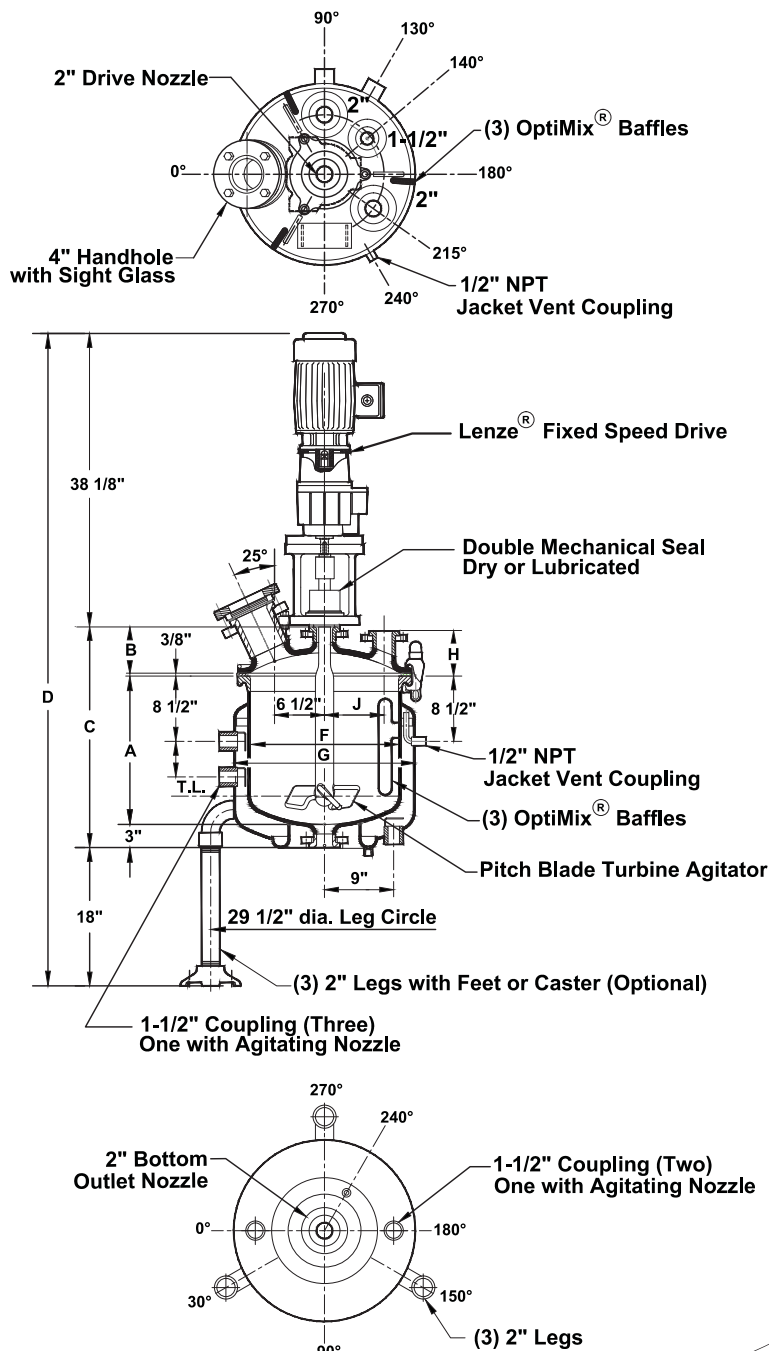

# CTJ-30 OPTIMIX® 30 GALLON JACKETED GLASS-LINED STEEL REACTOR

## Specifications

|                               |                            |
|-------------------------------|----------------------------|
| Vessel Design Pressure (psig) | 150 and F.V.               |
| Jacket Design Pressure (psig) | 115 or 100<br>w/ Int. F.V. |
| Design Temperature (°F)       | 500                        |
| Jacket Heating Area (sq. ft.) | 8.5                        |

## Dimensions (inches)

|                       |                                 |
|-----------------------|---------------------------------|
| A                     | 27 <sup>3</sup> / <sub>16</sub> |
| B                     | 6                               |
| C                     | 36 <sup>9</sup> / <sub>16</sub> |
| D                     | 90 <sup>9</sup> / <sub>16</sub> |
| E                     | 12 <sup>1</sup> / <sub>2</sub>  |
| F (I.D.)              | 19 <sup>1</sup> / <sub>4</sub>  |
| G (O.D.)              | 23 <sup>5</sup> / <sub>8</sub>  |
| H (nozzle elevations) |                                 |
| 1 1/2" nozzle         | 5                               |
| 2" nozzles            | 5 <sup>1</sup> / <sub>2</sub>   |
| J (nozzle radius)     |                                 |
| 1 1/2" nozzle         | 7 <sup>1</sup> / <sub>4</sub>   |
| 2" nozzles            | 7 <sup>3</sup> / <sub>4</sub>   |

## Capacity (gallons)

|                        |      |
|------------------------|------|
| Working                | 30   |
| Total Volume           | 34   |
| Head Volume            | 3    |
| Per Inch Straight Side | 1.25 |

## Weight (pounds)


|                              |     |
|------------------------------|-----|
| Bare Body (no accessories)   | 763 |
| Complete (with drive system) | 967 |
| Add for Shipping             | 150 |

## Lenze® Helical Gear Drive

|                   |                 |
|-------------------|-----------------|
| Motor             | 1.5HP           |
| Motor Type        | XP              |
| Drive Size        | GST06 2D VCR 5D |
| • Low Noise Level |                 |

## Pitch Blade Turbine Agitator

|                        |               |
|------------------------|---------------|
| Span (inches)          | 12            |
| Blade Angle            | 45°           |
| Speed (standard speed) | 40 to 228 RPM |
| • Clockwise Rotation   |               |

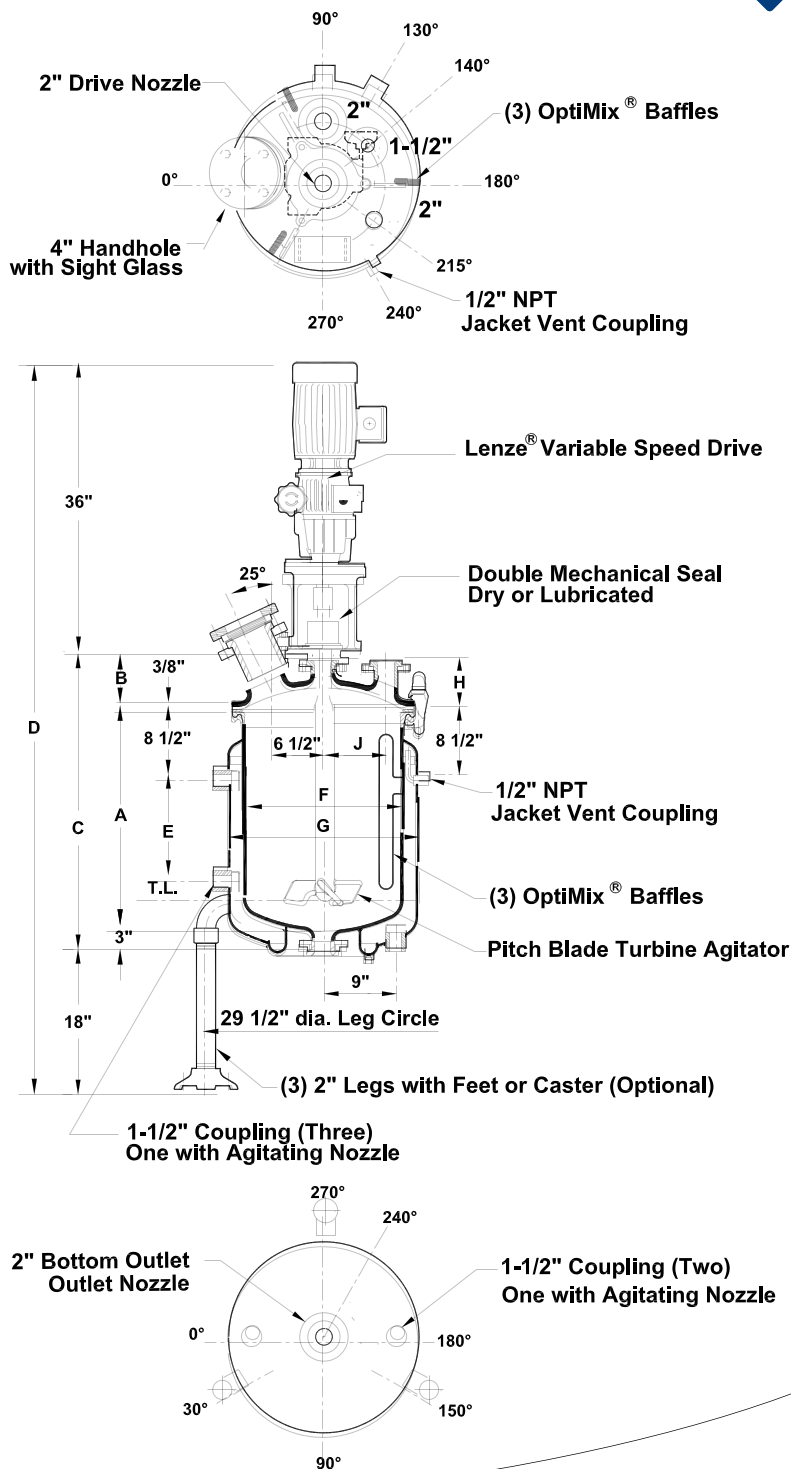

# CTJ-50 OPTIMIX® 50 GALLON JACKETED GLASS-LINED STEEL REACTOR

## Specifications

|                               |                            |
|-------------------------------|----------------------------|
| Vessel Design Pressure (psig) | 150 and F.V.               |
| Jacket Design Pressure (psig) | 125 or 110<br>w/ Int. F.V. |
| Design Temperature (°F)       | 500                        |
| Jacket Heating Area (sq. ft.) | 14                         |

## Dimensions (inches)

|                       |         |
|-----------------------|---------|
| A                     | 28      |
| B                     | 6 1/2   |
| C                     | 37 7/8  |
| D                     | 97 7/8  |
| F (I.D.)              | 22 7/8  |
| G (O.D.)              | 27 9/16 |
| H (nozzle elevations) |         |
| 1 1/2"                | 5 1/2   |
| 2"                    | 6       |
| 3"                    | 6       |

## Capacity (gallons)

|                        |      |
|------------------------|------|
| Working                | 50   |
| Total Volume           | 50.5 |
| Head Volume            | 5    |
| Per Inch Straight Side | 1.76 |

## Weight (pounds)


|                              |       |
|------------------------------|-------|
| Bare Body (no accessories)   | 920   |
| Complete (with drive system) | 1,400 |
| Add for Shipping             | 150   |

## Lenze® Helical Gear Drive

|                   |                 |
|-------------------|-----------------|
| Motor             | 2HP             |
| Motor Type        | XP              |
| Drive Size        | GST06 2D VCR 5D |
| • Low Noise Level |                 |

## Pitch Blade Turbine Agitator

|                        |               |
|------------------------|---------------|
| Span (inches)          | 12            |
| Blade Angle            | 45°           |
| Speed (standard speed) | 31 to 178 RPM |
| • Clockwise Rotation   |               |

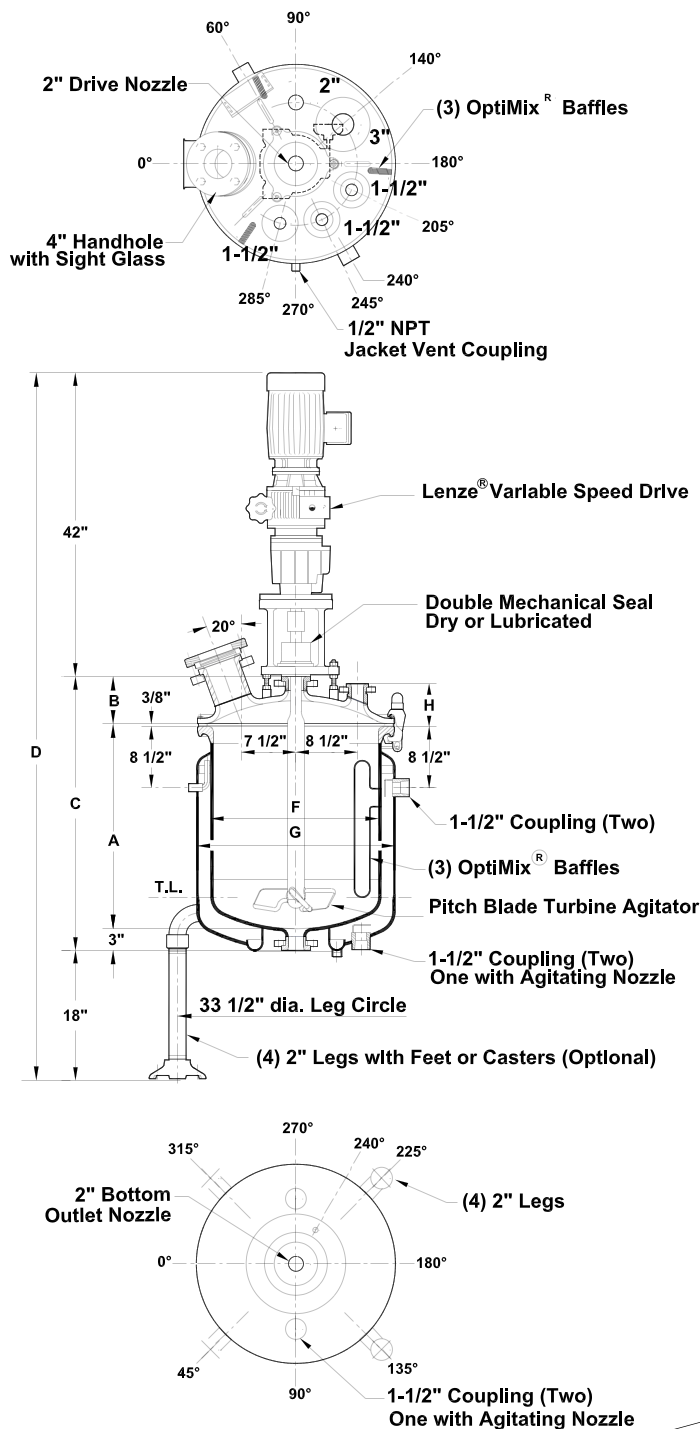

# CTJ-100 OPTIMIX® 100 GALLON JACKETED GLASS-LINED STEEL REACTOR

## Specifications

|                               |                            |
|-------------------------------|----------------------------|
| Vessel Design Pressure (psig) | 150 and F.V.               |
| Jacket Design Pressure (psig) | 115 or 100<br>w/ Int. F.V. |
| Design Temperature (°F)       | 500                        |
| Jacket Heating Area (sq. ft.) | 25.5                       |

## Dimensions (inches)

|                             |         |
|-----------------------------|---------|
| A                           | 36 1/4  |
| B                           | 14 1/2  |
| C                           | 54 5/8  |
| D                           | 122 5/8 |
| F (I.D.)                    | 32      |
| G (O.D.)                    | 37 3/8  |
| H (nozzle elevations)<br>4" | 14      |

## Capacity (gallons)

|                        |       |
|------------------------|-------|
| Working                | 100   |
| Total Volume           | 145.5 |
| Head Volume            | 18.5  |
| Per Inch Straight Side | 3.5   |

## Weight (pounds)


|                              |       |
|------------------------------|-------|
| Bare Body (no accessories)   | 1,550 |
| Complete (with drive system) | 2,060 |
| Add for Shipping             | 400   |

## Lenze® Helical Gear Drive

|                   |                 |
|-------------------|-----------------|
| Motor             | 3HP             |
| Motor Type        | XP              |
| Drive Size        | GST07 2D VCR 5E |
| • Low Noise Level |                 |

## Pitch Blade Turbine Agitator

|                        |               |
|------------------------|---------------|
| Span (inches)          | 16            |
| Blade Angle            | 45°           |
| Speed (standard speed) | 27 to 156 RPM |
| • Clockwise Rotation   |               |

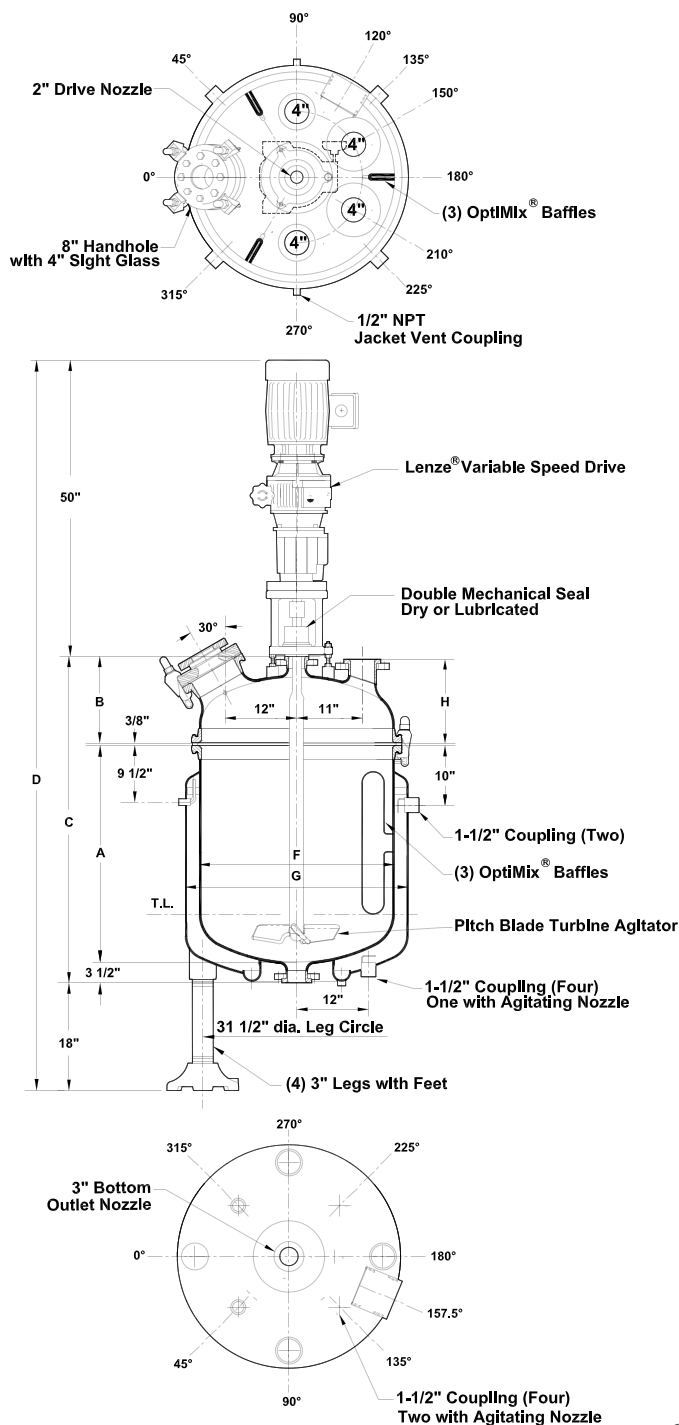

# GL-300 OPTIMIX® 300 GALLON JACKETED GLASS-LINED STEEL REACTOR

## Specifications

|                               |                         |
|-------------------------------|-------------------------|
| Vessel Design Pressure (psig) | 130 and F.V.            |
| Jacket Design Pressure (psig) | 100 or 100 w/ Int. F.V. |
| Design Temperature (°F)       | 500                     |
| Jacket Heating Area (sq. ft.) | 52.86                   |

## Dimensions (inches)

|                       |                                 |
|-----------------------|---------------------------------|
| A                     | 32 <sup>3</sup> / <sub>4</sub>  |
| B                     | 12 <sup>1</sup> / <sub>8</sub>  |
| C                     | 57                              |
| D                     | 130 <sup>1</sup> / <sub>4</sub> |
| E                     | 24                              |
| F (I.D.)              | 48                              |
| G (O.D.)              | 53 <sup>1</sup> / <sub>8</sub>  |
| H (nozzle elevations) |                                 |
| 3"                    | 11                              |
| 4"                    | 11 <sup>1</sup> / <sub>4</sub>  |
| 6"                    | 12 <sup>1</sup> / <sub>4</sub>  |

## Capacity (gallons)

|                        |     |
|------------------------|-----|
| Working                | 300 |
| Total Volume           | 378 |
| Head Volume            | 62  |
| Per Inch Straight Side | 8   |

## Weight (pounds)

|                              |       |
|------------------------------|-------|
| Bare Body (no accessories)   | 4,120 |
| Complete (with drive system) | 5,220 |
| Add for Shipping             | 1,000 |


## Series 60 Drive

|            |       |
|------------|-------|
| Motor      | 3HP   |
| Motor Type | XP    |
| Drive Size | 61Q06 |

- Three Year Warranty
- Low Noise Level
- Helical Gearing

## GlasLock® Agitator

|                                          |        |
|------------------------------------------|--------|
| Span (inches)                            | 26     |
| Speed (standard speed)                   | 125RPM |
| • Clockwise or Counterclockwise Rotation |        |
| • Optional Low Level Agitation           |        |

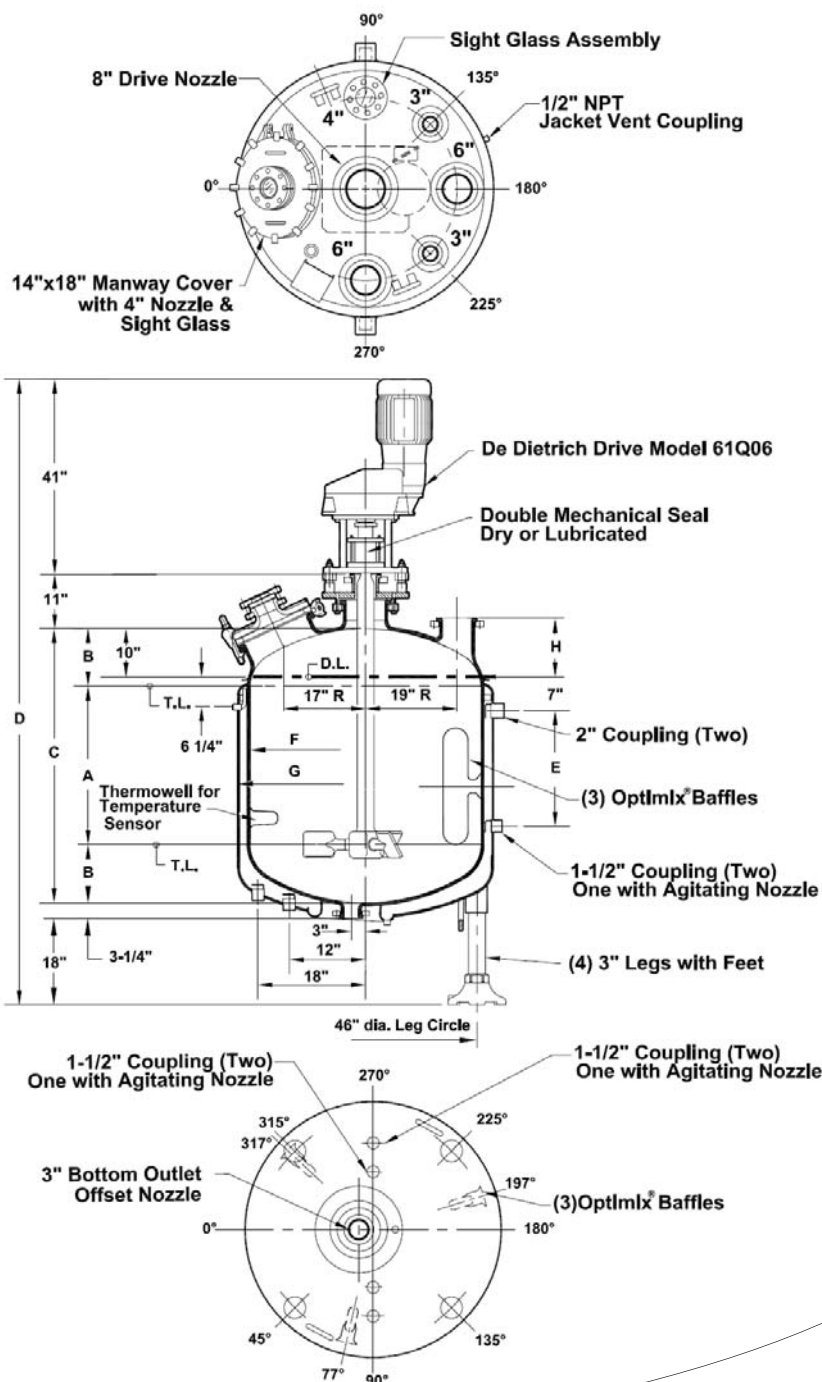



# GL-500 OPTIMIX® 500 GALLON JACKETED GLASS-LINED STEEL REACTOR

## Specifications

|                               |                         |
|-------------------------------|-------------------------|
| Vessel Design Pressure (psig) | 130 and F.V.            |
| Jacket Design Pressure (psig) | 100 or 100 w/ Int. F.V. |
| Design Temperature (°F)       | 500                     |
| Jacket Heating Area (sq. ft.) | 80                      |

## Dimensions (inches)

|                       |                                 |
|-----------------------|---------------------------------|
| A                     | 57 <sup>3</sup> / <sub>4</sub>  |
| B                     | 12 <sup>1</sup> / <sub>8</sub>  |
| C                     | 82                              |
| D                     | 155 <sup>1</sup> / <sub>4</sub> |
| E                     | 43                              |
| F (I.D.)              | 48                              |
| G (O.D.)              | 53 <sup>1</sup> / <sub>8</sub>  |
| H (nozzle elevations) |                                 |
| 3"                    | 11                              |
| 4"                    | 11 <sup>1</sup> / <sub>4</sub>  |
| 6"                    | 12 <sup>1</sup> / <sub>4</sub>  |

## Capacity (gallons)

|                        |     |
|------------------------|-----|
| Working                | 500 |
| Total Volume           | 572 |
| Head Volume            | 62  |
| Per Inch Straight Side | 8   |

## Weight (pounds)

|                              |       |
|------------------------------|-------|
| Bare Body (no accessories)   | 5,250 |
| Complete (with drive system) | 6,350 |
| Add for Shipping             | 1,000 |


## Series 60 Drive

|            |       |
|------------|-------|
| Motor      | 5HP   |
| Motor Type | XP    |
| Drive Size | 61Q06 |

- Three Year Warranty
- Low Noise Level
- Helical Gearing

## GlasLock® Agitator

|                                          |        |
|------------------------------------------|--------|
| Span (inches)                            | 26     |
| Speed (standard speed)                   | 125RPM |
| • Clockwise or Counterclockwise Rotation |        |
| • Optional Low Level Agitation           |        |

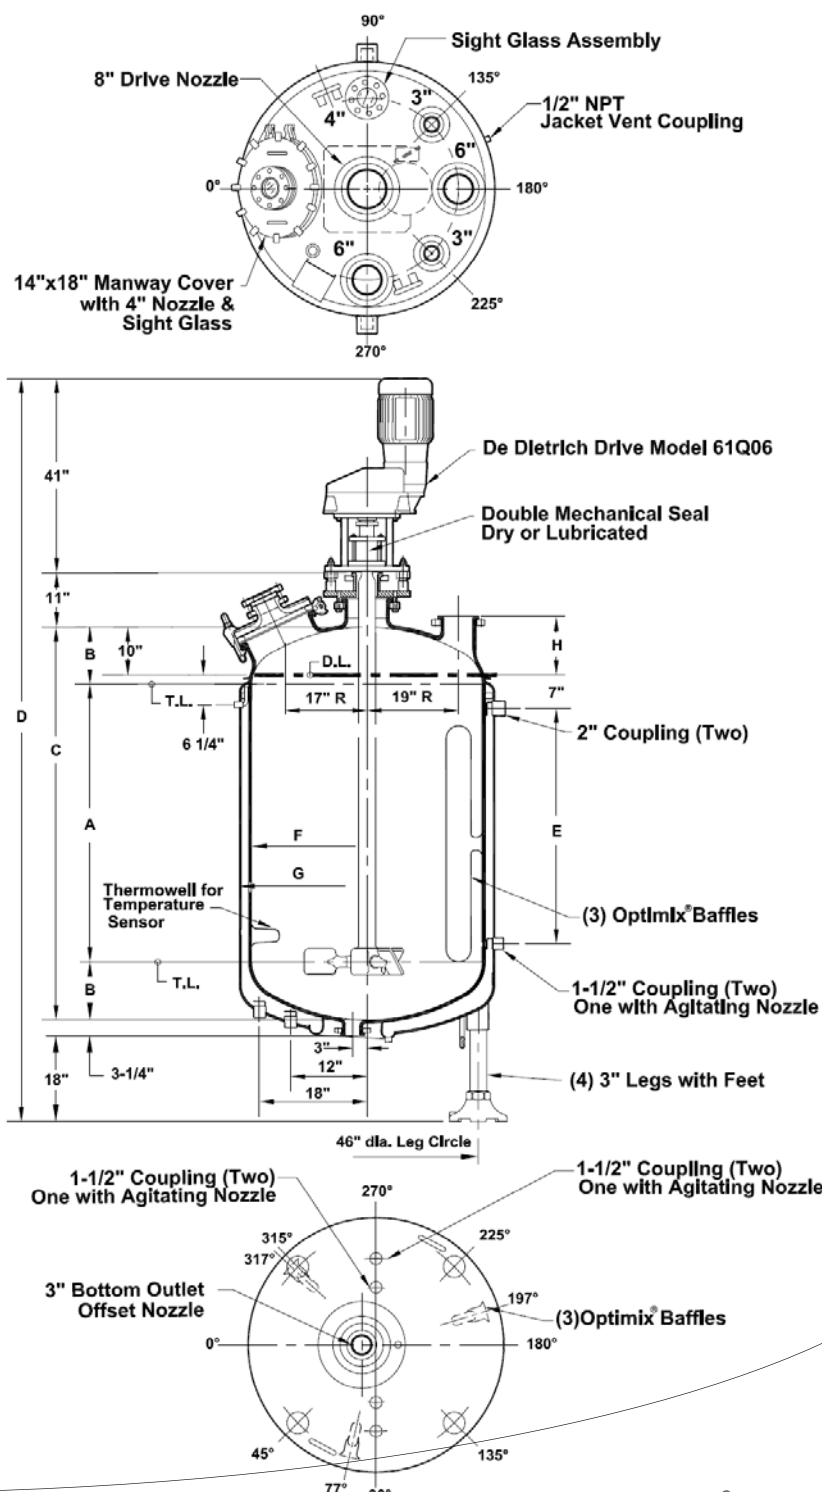

De Dietrich Process Systems, Inc.

244 Sheffield Street  
Mountainside, NJ 07092

P 908.317.2585  
F 908.889.4960

www.ddpsinc.com  
sales@ddpsinc.com

# GL-750 OPTIMIX® 750 GALLON JACKETED GLASS-LINED STEEL REACTOR

## Specifications

|                               |                          |
|-------------------------------|--------------------------|
| Vessel Design Pressure (psig) | 130 and F.V.             |
| Jacket Design Pressure (psig) | 90 or 90<br>w/ Int. F.V. |
| Design Temperature (°F)       | 500                      |
| Jacket Heating Area (sq. ft.) | 100                      |

## Dimensions (inches)

|                       |                                  |
|-----------------------|----------------------------------|
| A                     | 50 <sup>3</sup> / <sub>4</sub>   |
| B                     | 15 <sup>5</sup> / <sub>8</sub>   |
| C                     | 82                               |
| D                     | 162                              |
| E                     | 24 <sup>3</sup> / <sub>4</sub>   |
| F (I.D.)              | 61 <sup>7</sup> / <sub>16</sub>  |
| G (O.D.)              | 66 <sup>15</sup> / <sub>16</sub> |
| H (nozzle elevations) |                                  |
| 4"                    | 14                               |
| 6"                    | 14 <sup>1</sup> / <sub>2</sub>   |
| 8"                    | 15 <sup>1</sup> / <sub>4</sub>   |

## Capacity (gallons)

|                        |     |
|------------------------|-----|
| Working                | 750 |
| Total Volume           | 907 |
| Head Volume            | 129 |
| Per Inch Straight Side | 13  |

## Weight (pounds)

|                              |       |
|------------------------------|-------|
| Bare Body (no accessories)   | 7,320 |
| Complete (with drive system) | 8,520 |
| Add for Shipping             | 1,000 |




## Series 60 Drive

|            |       |
|------------|-------|
| Motor      | 7.5HP |
| Motor Type | XP    |
| Drive Size | 61Q06 |

- Three Year Warranty
- Low Noise Level
- Helical Gearing

## GlasLock® Agitator

|                                          |                                |
|------------------------------------------|--------------------------------|
| Span (inches)                            | 29 <sup>1</sup> / <sub>2</sub> |
| Speed (standard speed)                   | 125RPM                         |
| • Clockwise or Counterclockwise Rotation |                                |
| • Optional Low Level Agitation           |                                |

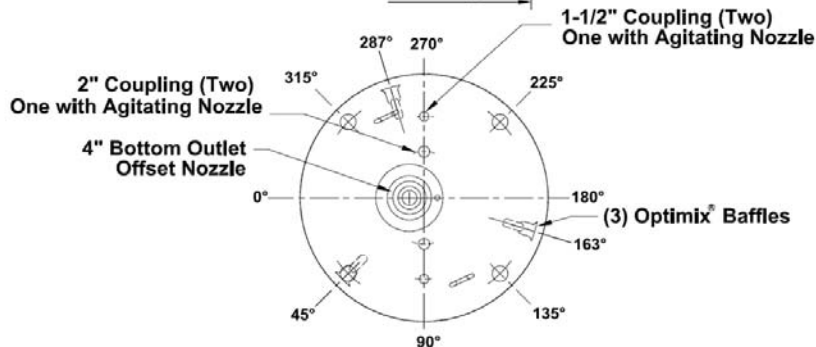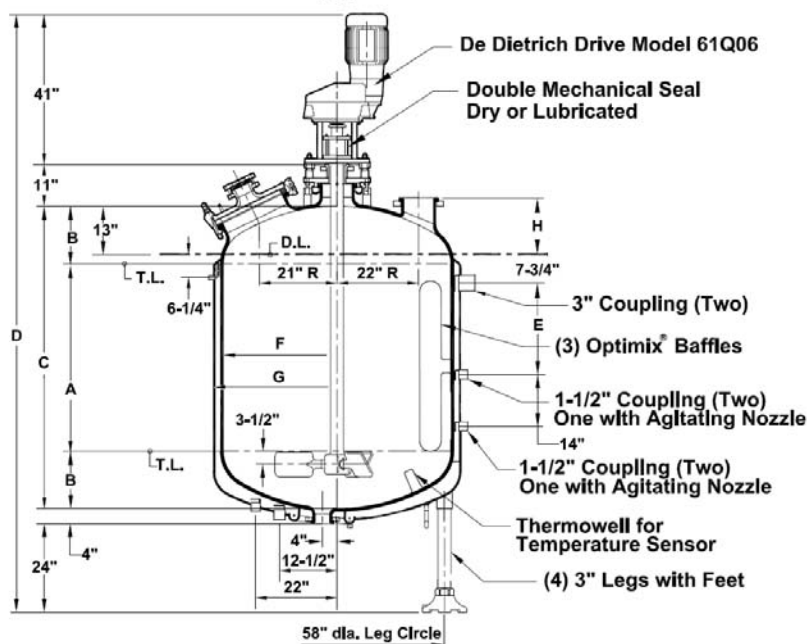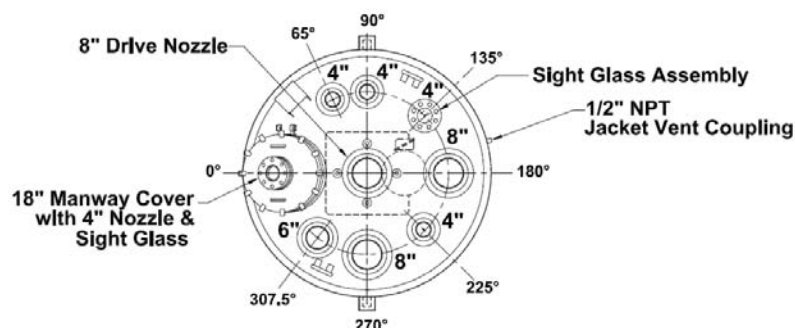

# GL-1000 OPTIMIX® 1,000 GALLON JACKETED GLASS-LINED STEEL REACTOR

## Specifications

|                               |                          |
|-------------------------------|--------------------------|
| Vessel Design Pressure (psig) | 130 and F.V.             |
| Jacket Design Pressure (psig) | 90 or 90<br>w/ Int. F.V. |
| Design Temperature (°F)       | 500                      |
| Jacket Heating Area (sq. ft.) | 127                      |

## Dimensions (inches)

|                       |                                  |
|-----------------------|----------------------------------|
| A                     | 70 <sup>3</sup> / <sub>4</sub>   |
| B                     | 15 <sup>5</sup> / <sub>8</sub>   |
| C                     | 102                              |
| D                     | 184 <sup>1</sup> / <sub>2</sub>  |
| E                     | 38 <sup>3</sup> / <sub>4</sub>   |
| F (I.D.)              | 61 <sup>7</sup> / <sub>16</sub>  |
| G (O.D.)              | 66 <sup>15</sup> / <sub>16</sub> |
| H (nozzle elevations) |                                  |
| 4"                    | 14                               |
| 6"                    | 14 <sup>1</sup> / <sub>2</sub>   |
| 8"                    | 15 <sup>1</sup> / <sub>4</sub>   |

## Capacity (gallons)

|                        |       |
|------------------------|-------|
| Working                | 1,000 |
| Total Volume           | 1,163 |
| Head Volume            | 129   |
| Per Inch Straight Side | 13    |

## Weight (pounds)

|                              |        |
|------------------------------|--------|
| Bare Body (no accessories)   | 8,970  |
| Complete (with drive system) | 10,570 |
| Add for Shipping             | 1,500  |


## Series 60 Drive

|            |       |
|------------|-------|
| Motor      | 10HP  |
| Motor Type | XP    |
| Drive Size | 62Q08 |

- Three Year Warranty
- Low Noise Level
- Helical Gearing

## GlasLock® Agitator

|                                          |                                |
|------------------------------------------|--------------------------------|
| Span (inches)                            | 29 <sup>1</sup> / <sub>2</sub> |
| Speed (standard speed)                   | 125RPM                         |
| • Clockwise or Counterclockwise Rotation |                                |
| • Optional Low Level Agitation           |                                |

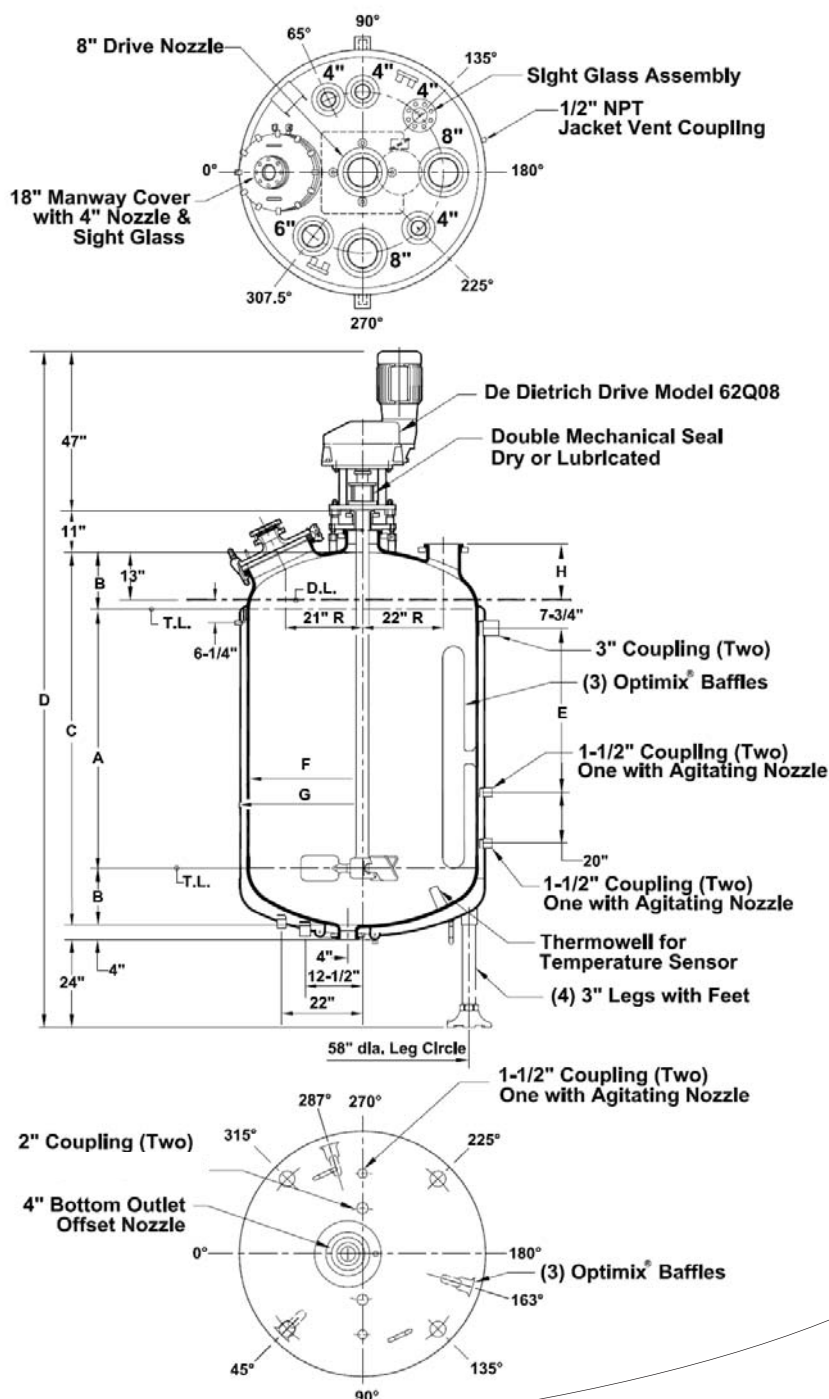

De Dietrich Process Systems, Inc.

244 Sheffield Street  
Mountainside, NJ 07092

P 908.317.2585  
F 908.889.4960

www.ddpsinc.com  
sales@ddpsinc.com



# GL-1500 OPTIMIX® 1,500 GALLON JACKETED GLASS-LINED STEEL REACTOR

## Specifications

|                               |                          |
|-------------------------------|--------------------------|
| Vessel Design Pressure (psig) | 130 and F.V.             |
| Jacket Design Pressure (psig) | 90 or 90<br>w/ Int. F.V. |
| Design Temperature (°F)       | 500                      |
| Jacket Heating Area (sq. ft.) | 159                      |

## Dimensions (inches)

|                       |          |
|-----------------------|----------|
| A                     | 65       |
| B                     | 19 1/2   |
| C                     | 104      |
| D                     | 186 7/8  |
| E                     | 34 1/4   |
| F (I.D.)              | 76 7/8   |
| G (O.D.)              | 82 11/16 |
| H (nozzle elevations) |          |
| 4"                    | 16       |
| 6"                    | 17       |
| 8"                    | 17 1/4   |
| 10"                   | 18       |

## Capacity (gallons)

|                        |       |
|------------------------|-------|
| Working                | 1,500 |
| Total Volume           | 1,810 |
| Head Volume            | 254   |
| Per Inch Straight Side | 20    |

## Weight (pounds)

|                              |        |
|------------------------------|--------|
| Bare Body (no accessories)   | 14,000 |
| Complete (with drive system) | 15,700 |
| Add for Shipping             | 1,500  |


## Series 60 Drive

|            |       |
|------------|-------|
| Motor      | 15HP  |
| Motor Type | XP    |
| Drive Size | 62Q08 |

- Three Year Warranty
- Low Noise Level
- Helical Gearing

## GlasLock® Agitator

|                                          |        |
|------------------------------------------|--------|
| Span (inches)                            | 33 1/2 |
| Speed (standard speed)                   | 125RPM |
| • Clockwise or Counterclockwise Rotation |        |
| • Optional Low Level Agitation           |        |

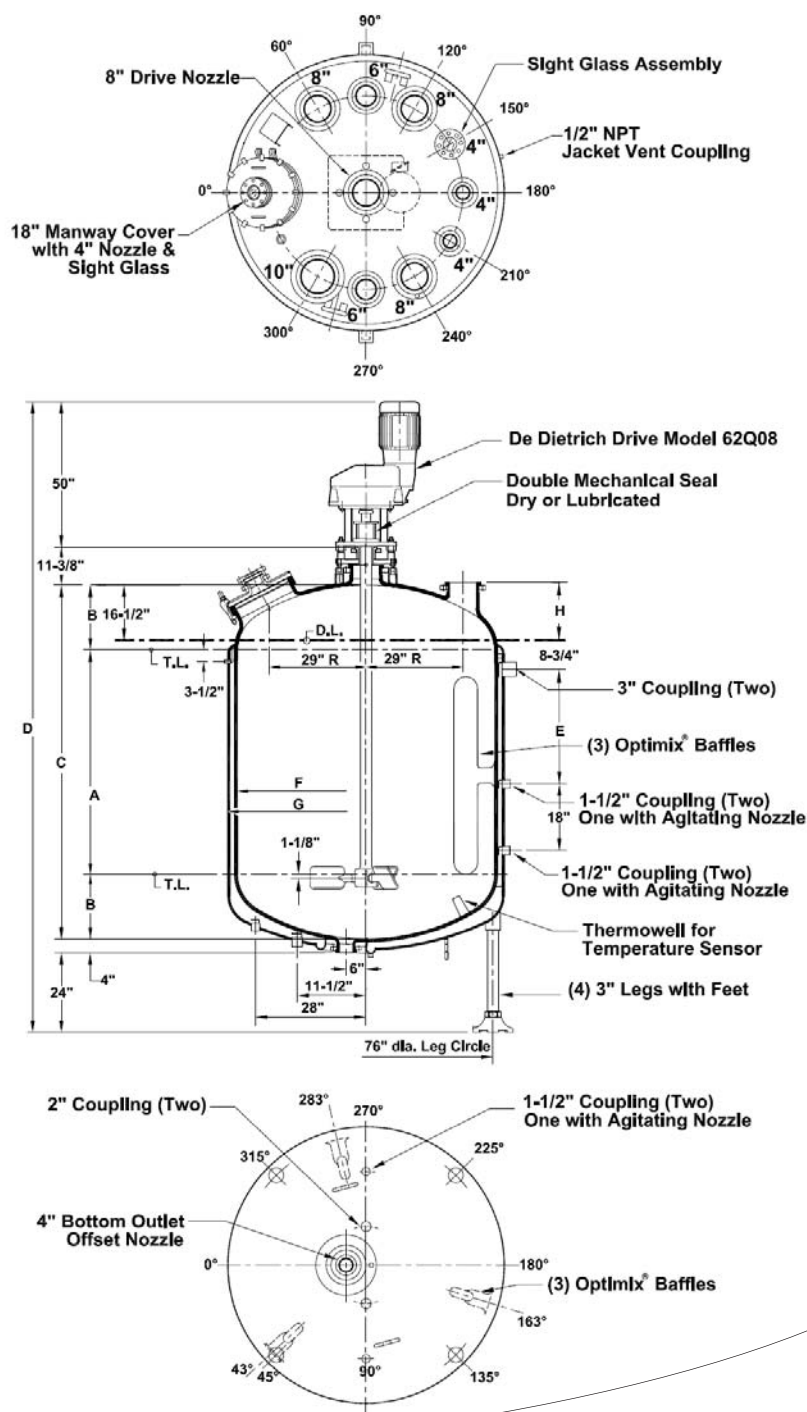

De Dietrich Process Systems, Inc.

244 Sheffield Street  
Mountainside, NJ 07092

P 908.317.2585  
F 908.889.4960

www.ddpsinc.com  
sales@ddpsinc.com

# GL-2000 OPTIMIX® 2,000 GALLON JACKETED GLASS-LINED STEEL REACTOR

## Specifications

|                               |                          |
|-------------------------------|--------------------------|
| Vessel Design Pressure (psig) | 130 and F.V.             |
| Jacket Design Pressure (psig) | 90 or 90<br>w/ Int. F.V. |
| Design Temperature (°F)       | 500                      |
| Jacket Heating Area (sq. ft.) | 192                      |

## Dimensions (inches)

|                       |          |
|-----------------------|----------|
| A                     | 84       |
| B                     | 19 1/2   |
| C                     | 123      |
| D                     | 205 7/8  |
| E                     | 51 1/4   |
| F (I.D.)              | 76 7/8   |
| G (O.D.)              | 82 11/16 |
| H (nozzle elevations) |          |
| 4"                    | 16       |
| 6"                    | 17       |
| 8"                    | 17 1/4   |
| 10"                   | 18       |

## Capacity (gallons)

|                        |       |
|------------------------|-------|
| Working                | 2,000 |
| Total Volume           | 2,190 |
| Head Volume            | 254   |
| Per Inch Straight Side | 20    |

## Weight (pounds)

|                              |        |
|------------------------------|--------|
| Bare Body (no accessories)   | 15,785 |
| Complete (with drive system) | 17,670 |
| Add for Shipping             | 1,500  |


## Series 60 Drive

|            |       |
|------------|-------|
| Motor      | 15HP  |
| Motor Type | XP    |
| Drive Size | 62Q08 |

- Three Year Warranty
- Low Noise Level
- Helical Gearing

## GlasLock® Agitator

|                                          |        |
|------------------------------------------|--------|
| Span (inches)                            | 33 1/2 |
| Speed (standard speed)                   | 125RPM |
| • Clockwise or Counterclockwise Rotation |        |
| • Optional Low Level Agitation           |        |

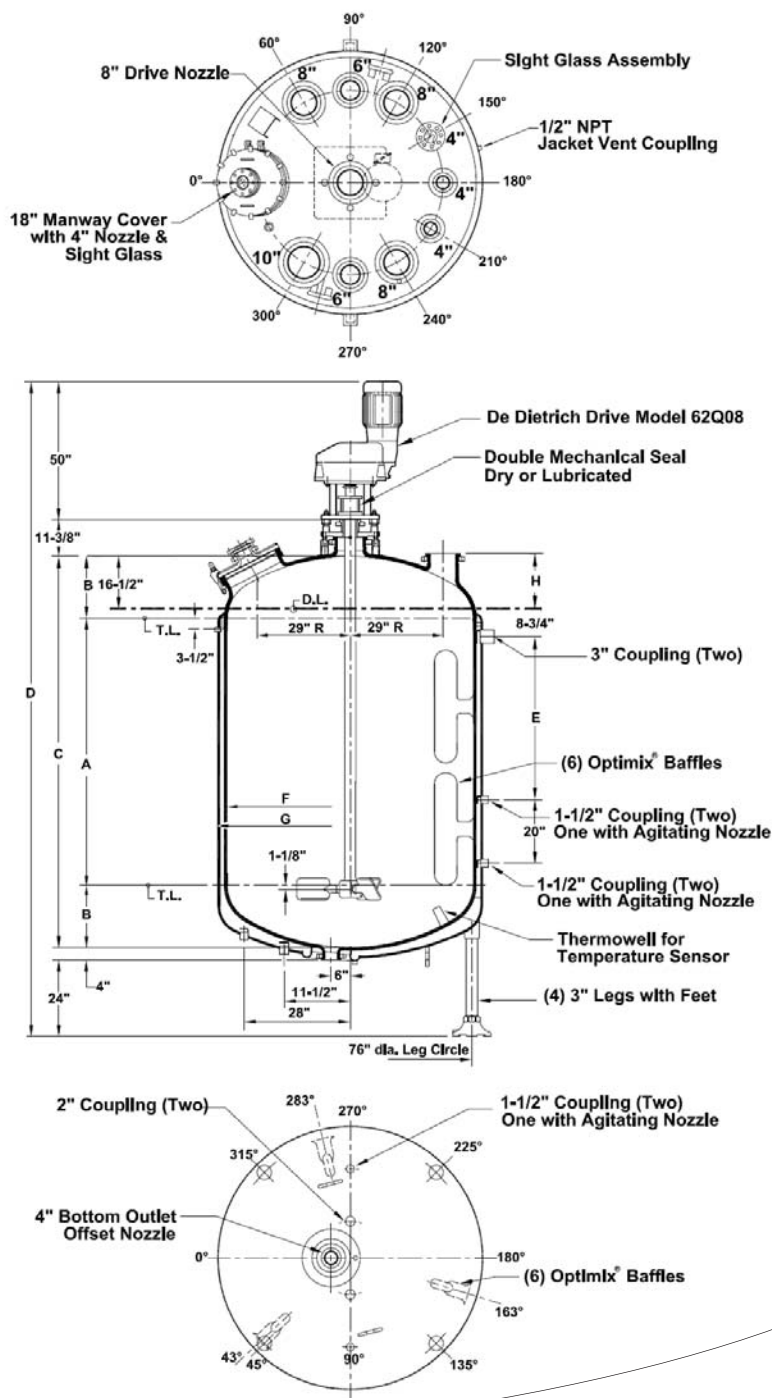

# GL-3000 OPTIMIX® 3,000 GALLON JACKETED GLASS-LINED STEEL REACTOR



## Specifications

|                               |                       |
|-------------------------------|-----------------------|
| Vessel Design Pressure (psig) | 130 and F.V.          |
| Jacket Design Pressure (psig) | 90 or 90 w/ Int. F.V. |
| Design Temperature (°F)       | 500                   |
| Jacket Heating Area (sq. ft.) | 241                   |

## Dimensions (inches)

|                       |         |
|-----------------------|---------|
| A                     | 76      |
| B                     | 24 1/2  |
| C                     | 125     |
| D                     | 216 1/4 |
| E                     | 43      |
| F (I.D.)              | 96 9/16 |
| G (O.D.)              | 102 3/8 |
| H (nozzle elevations) |         |
| 4"                    | 18      |
| 6"                    | 18 3/4  |
| 8"                    | 19 1/4  |
| 10"                   | 20      |

## Capacity (gallons)

|                        |       |
|------------------------|-------|
| Working                | 3,000 |
| Total Volume           | 3,398 |
| Head Volume            | 501   |
| Per Inch Straight Side | 32    |

## Weight (pounds)

|                              |        |
|------------------------------|--------|
| Bare Body (no accessories)   | 23,350 |
| Complete (with drive system) | 25,750 |
| Add for Shipping             | 1,500  |


## Series 60 Drive

|            |       |
|------------|-------|
| Motor      | 20HP  |
| Motor Type | XP    |
| Drive Size | 63Q12 |

- Three Year Warranty
- Low Noise Level
- Helical Gearing

## GlasLock® Agitator

|                                          |        |
|------------------------------------------|--------|
| Span (inches)                            | 41 3/8 |
| Speed (standard speed)                   | 100RPM |
| • Clockwise or Counterclockwise Rotation |        |
| • Optional Low Level Agitation           |        |

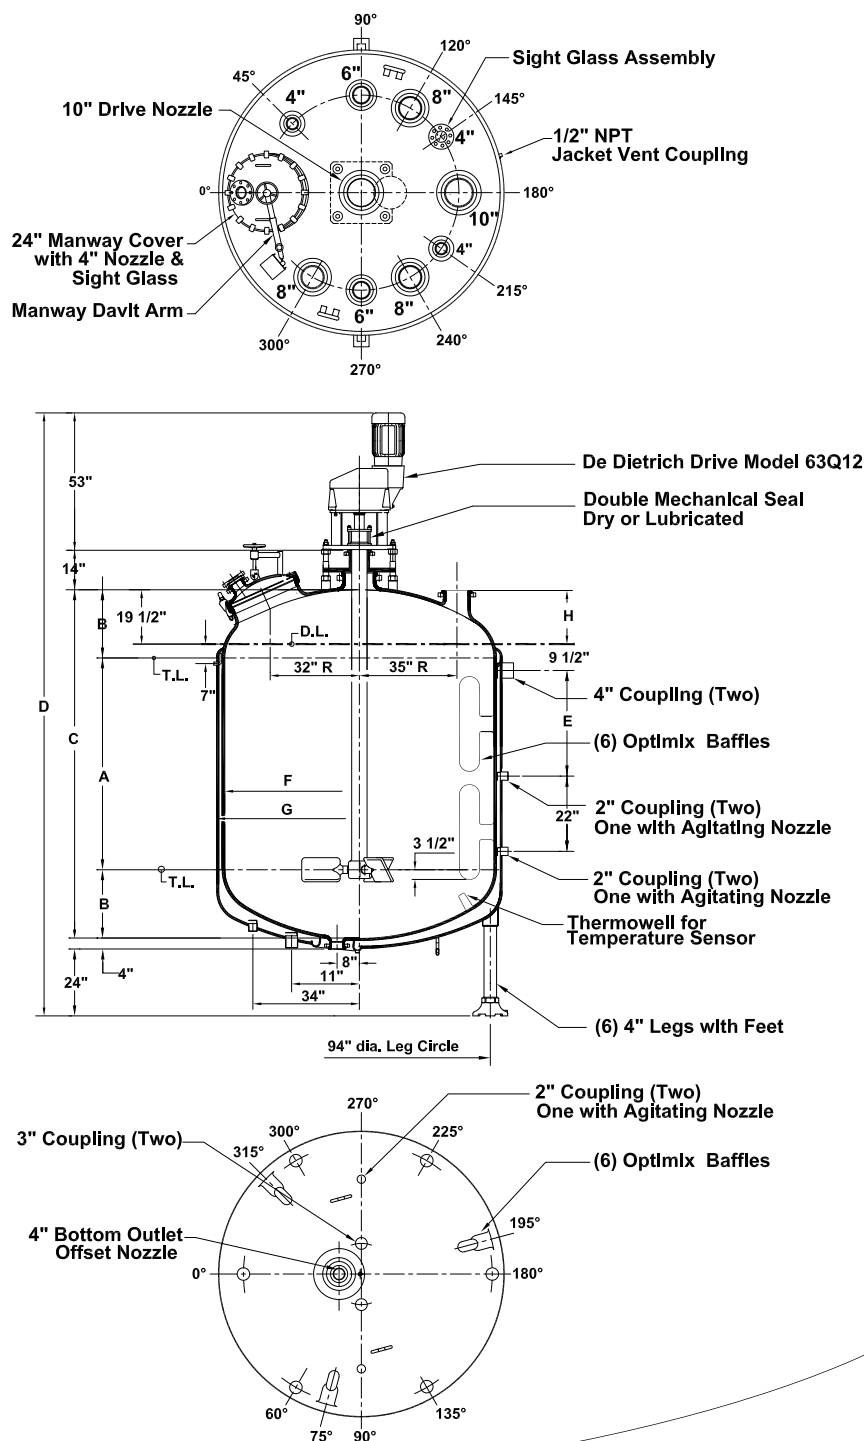

De Dietrich Process Systems, Inc.

244 Sheffield Street  
Mountainside, NJ 07092

P 908.317.2585  
F 908.889.4960

www.ddpsinc.com  
sales@ddpsinc.com

# GL-4000 OPTIMIX® 4,000 GALLON JACKETED GLASS-LINED STEEL REACTOR

## Specifications

|                               |                          |
|-------------------------------|--------------------------|
| Vessel Design Pressure (psig) | 130 and F.V.             |
| Jacket Design Pressure (psig) | 90 or 90<br>w/ Int. F.V. |
| Design Temperature (°F)       | 500                      |
| Jacket Heating Area (sq. ft.) | 310                      |

## Dimensions (inches)

|                       |         |
|-----------------------|---------|
| A                     | 108     |
| B                     | 24 1/2  |
| C                     | 157     |
| D                     | 248 1/4 |
| E                     | 63      |
| F (I.D.)              | 96 9/16 |
| G (O.D.)              | 102 3/8 |
| H (nozzle elevations) |         |
| 4"                    | 18      |
| 6"                    | 18 3/4  |
| 8"                    | 19 1/4  |
| 10"                   | 20      |

## Capacity (gallons)

|                        |       |
|------------------------|-------|
| Working                | 4,000 |
| Total Volume           | 4,406 |
| Head Volume            | 501   |
| Per Inch Straight Side | 32    |

## Weight (pounds)

|                              |        |
|------------------------------|--------|
| Bare Body (no accessories)   | 28,100 |
| Complete (with drive system) | 31,050 |
| Add for Shipping             | 1,500  |

## Series 60 Drive

|            |       |
|------------|-------|
| Motor      | 20HP  |
| Motor Type | XP    |
| Drive Size | 63Q12 |

- Three Year Warranty
- Low Noise Level
- Helical Gearing

## GlasLock® Agitator

|                                          |        |
|------------------------------------------|--------|
| Span (inches)                            | 41 3/8 |
| Speed (standard speed)                   | 100RPM |
| • Clockwise or Counterclockwise Rotation |        |
| • Optional Low Level Agitation           |        |

